



VEILUX®

DUAL POWER TRUE DAY & NIGHT DNR COLOR CAMERA

SVS-60CDNRD

SPECIFICATIONS


| ITEM | SVS-60CDNRD | |
|--------------------------------|---|--------------------|
| TV System | NTSC | PAL |
| Sensor | 1/3" SONY SuperHAD II CCD | |
| Sync Internal | H/V 15.734 / 59.94 Hz | H/V 15.625 / 50 Hz |
| Sync Line Lock | H/V 15.750 / 60 Hz | H/V 15.625 / 50 Hz |
| Scanning System | 2 : 1 Interlace | |
| Horizontal Res. | 600TV Lines (Max.) / 700TV Lines (B/W) | |
| Min. Illumination Sense-Up Off | 0.12 Lux (15 IRE), 0.2 Lux (30 IRE), 0.4 Lux (50 IRE) F1.2 | |
| Min. Illumination Sense-Up On | 0.0002 Lux (15 IRE), 0.0005 Lux (30 IRE), 0.0008 Lux (50 IRE) F1.2 | |
| Video Output | 1.0Vp-p / 75ohm Video 0.714Vp-p | |
| Y Correction | 0.45 | |
| S/N | More than 52dB (AGC off) | |
| O.S.D. | Lens, E-Shutter, Backlight, WDR, AGC, Sens-Up, White Balance, Day & Night, Motion, Mirror, Sharpness, Gamma, Freeze, Nega, DNR, D-Zoom, LSC, Eclipse, DIS, Privacy, Communication, Sync, Camera-ID, Title | |
| Electrical Shutter | 1/60 ~ 1/120,000 | 1/50 ~ 1/120,000 |
| Privacy Masking | 8 Windows (Polygonal, 8 Colors) | |
| Day & Night | Color / BW / Auto / Ext | |
| Motion Detection | On / Off | |
| Digital Zoom | x1.0 ~ x10 | |
| Sens-Up (Low Shutter) | Off ~ x512 | |
| SYNC | Auto / Internal / Digital Line Lock | |
| White Balance | ATW / AWC / Manual / Push | |
| WDR | On / Off (Step 1, Step 2, Step 3) | |
| 3D-DNR | On / Off (Off, Low, Mid, High) | |
| LSC / DIS | On / Off | |
| Eclipse | On / Off | |
| AGC | Low / Middle / High / Off | |
| Lens | C/CS Mount | |
| Oper Temp'/Hum' | -20°C ~ 60°C / 30% ~ 80% | |
| Store Temp'/Hum' | -30°C ~ 60°C / 20% ~ 90% | |
| Power (Max.) | 12VDC / 24VAC | |
| Dimension | 61mm(W) x 55mm(H) x 106mm(L) | |
| Weight | About 460g | |



FEATURES

- 1/3" SONY SuperHAD II CCD
- High Resolution 600TV Lines
- True Day & Night (ICR IR Cut Filter Removable)
- WDR (Wide Dynamic Range)
- 3D DNR (Digital Noise Reduction)
- Zero Defect
- Eclipse Function
- Digital Zoom (x1 ~ x10)
- Motion Detection
- LCS (Lens Shading Compensation)
- Privacy Mask (Polygonal Mosaic)
- O.S.D. Menu Function
- Sens-Up Function (x512)
- Internal / Linelock Function
- Back Light Compensation
- DIS (Digital Image Stabilization)
- RS-485 / PELCO-D

DIMENSIONS

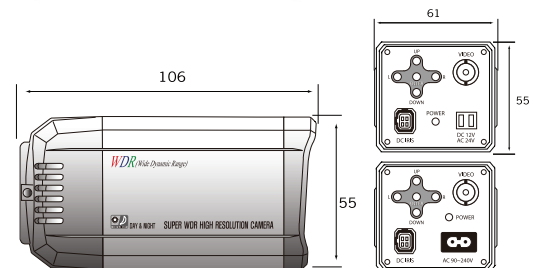

VEILUX®

The Art of Surveillance

3015 Eagle Drive, Suite 100, Grand Prairie, Texas 75052
 Local Number: (214) 635-4855 / Fax: (928) 437-6270
sales@veilux.net
www.veilux.net