



VEILUX®

DUAL POWER TRUE DAY & NIGHT DOME IR CAMERA

SVV-54IRC40L49D-B




SPECIFICATIONS

ITEM	SVD-54IRC40L49D-B	
Signal System	NTSC	PAL
Image Sensor	1/3" SONY Super HAD CCD	
CCD Total Pixel	811(H) X 508(V) 410K	795(H) X 596(V) 470K
Scanning System	525Lines, 60fields/sec	625Lines, 50fields/sec
Min. Illumination	0.1Lux 5600 K F2.0 / 0.000Lux (IR LED ON)	
Lens	4~9mm DC Auto Iris	
Resolution	540 TV Lines	
S/N Ratio	More than 48db (AGC OFF)	
White Balance	ATW	
WB Range	ATW (2500~10000K)	
Electronic Shutter	1/60~1/100,000 sec.	1/50~1/100,000 sec
Video Output	1.0 Vp-p Composite video at 75ohm	
IR LED	40 Units Infrared LED 20,000hrs 850nm(Optional)	
Gamma Correction	$\gamma=0.45$	
Beam Spread	36+56	
Night View Distance	Indoor 45m / Outdoor 25m	
Gain Control	AGC	
Operation Temp.	-20°C ~ 50°C	
Water Resistance	IP65	
Op' Humidity	Within 90% RH	
Dimensions	160(Ø) x 130(L) mm	
Power Supply	12VDC / 24VAC	
Cable	500mm BNC DC Jack	
Weight	Approximately 3.25 pounds	

FEATURES

- 1/3" SONY Super HAD CCD
- 540 TV Lines
- True Day & Night (ICR-IR Cut Filter Removable)
- 3-Axis Gimbal
- Dwell Time Setting (Default 20 Sec.)
- External Control: Focus/Distance/DC Level/LED Level/ Flickerless, (Option)
- Back Light Compensation
- High Resolution: Vivid Sharp Picture
- Indoor: 45m: Outdoor: 25m Night View Distance
- 40 Units Infrared IR LED
- Rainproof (IP-65)
- Dampproof
- 12VDC / 24VAC - Dual Power

DIMENSION

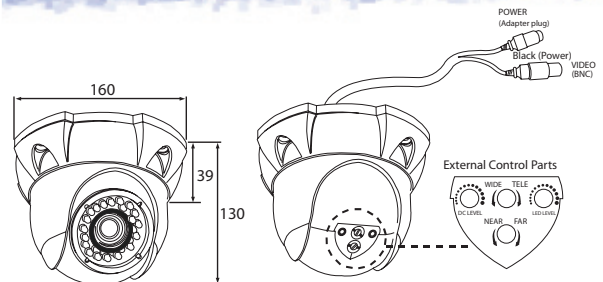

VEILUX®

The Art of Surveillance