



VEILUX®

DUAL POWER TRUE DAY & NIGHT WDR 3D DNR VANDAL PROOF IR DOME CAMERA

SVV-60IRC30L2812D

The Veilux SVV-60IRC30L2812D vandal proof infrared dome security camera is heavy duty with superior quality and super wide dynamic range (S-WDR), day/night camera, offering extremely low lux, utilizing 2D/3D digital noise reduction technology. The SVV-60IRC30L2812D dome camera is suitable for indoor or outdoor applications. The infrared LEDs offer additional light in situations where there is complete darkness. Veilux SVV-60IRC30L2812D utilizes the new Veilux WDXV7 DSP chip which features extremely low lux requirements as low as 0 @ 15IRE with up to 512x sens-up. With the new Veilux WDXV7 DSP chip in combination with the Sony Super HAD II CCDs SVV-60IRC30L2812D produces superior crisp images over a wide dynamic range of light conditions with extreme back light variations. Veilux SVV-60IRC30L2812D camera are ALL IN ONE INCLUSIVE camera covers all required market applications such as retail, banks, transportations, airports as well as mobile applications. The veilux 2D/3D DNR technology utilized in this camera offer hard disk storage savings of up to 75% while recording on motion due to extreme night noise reduction.



Veilux camera designs offer on screen display feature making configuration of advanced feature,s easy to achieve, optimal video quality for all applications. Veilux SVV-60IRC30L2812D security cameras are the only all inclusive cameras in the industry to offer one solution suitable for all applications.

FEATURES

- 1/3" SONY SuperHAD II CCD
- High Resolution 600TV Lines
- Day & Night (ICR-IR Cut Filter Removeable)
- IR LED (Main): 30 Units 850nm Infrared LED, 20,000 Hrs
- Night View Distance: Indoor 35m / Outdoor 25m
- WDR (Wide Dynamic Range)
- 3D DNR (Digital Noise Reduction)
- Sens-Up Function (x512)
- Internal / Line Lock Function
- Digital Zoom (x1 ~ x10)
- DIS (Digital Image Stabilization)
- LSC (Lens Shading Compensation)
- Privacy Mask (Polygonal Mosaic)
- Zero Defect
- Eclipse Function
- Backlight Compensation
- Motion Detection
- RS-485 / PELCO-D
- O.S.D. Menu Function

AGC Auto Gain Control OFF ON	0 LUX	MIRROR FUNCTION BB
AWB Auto White Balance	VOLTAGE 12DC 24AC	VANDALPROOF
BLC Back Light Compensation OFF ON	600 TV LINES	IR LED
DC AUTO IRIS	D&N NIGHT DAY	10x ZOOM
3-AXIS	3D-DNR	SUPER WDR

3015 Eagle Drive, Suite 100, Grand Prairie, Texas 75052
 Local Number: (214) 635-4855 / Fax: (928) 437-6270
sales@veilux.net
www.veilux.net



VEILUX®
The Art of Surveillance



VEILUX®




DUAL POWER TRUE DAY & NIGHT WDR 3D DNR VANDAL PROOF IR DOME CAMERA

SVV-60IRC30L2812D

SPECIFICATIONS

ITEM	SVV-60IRC30L2812D	
Signal System	NTSC	PAL
Sensor	1/3" SONY SuperHAD II CCD	
Sync Internal	H/V 15.734 / 59.94 Hz	H/V 15.625 / 50 Hz
Sync Line Lock	H/V 15.750 / 60 Hz	H/V 15.625 / 50 Hz
Min. Illumination Sense-Up Off	0.12 Lux (15 IRE), 0.2 Lux (30 IRE), 0.4 Lux (50 IRE) F1.2	
Min. Illumination Sense-Up On	0 Lux (15 IRE), 0 Lux (30 IRE), 0 Lux (50 IRE) F1.2	
Y Correction	0.45	
Scanning System	2:1 Interlace	
Horizontal Res.	600TV Lines (Max.) / 700TV Lines (B/W)	
Video Output	1.0 Vp-p / 75ohm Video 0.714 Vp-p	
O.S.D.	Lens, E-Shutter, Backlight, WDR, AGC, Sens-Up, White Balance, Day & Night, Motion, Mirror, Sharpness, Gamma, Freeze, Nega, DNR, D-Zoom, LSC, Eclipse, DIS, Privacy, Communication, Sync, Title, Language, DPC, Filter	
S/N	More than 52dB (AGC OFF)	
Electronic Shutter	1/60~1/100,000 sec.	1/50~1/100,000 sec
Privacy Masking	8 Windows (Polygonal, 8 Colors)	
Day & Night	Color / BW / Auto / EXT	
Motion Detection	On / Off	
Digital Zoom	x1.0 ~ x10	
Sens-Up (Low Shutter)	Auto, Off, Manual (x2 ~ x512)	
Sync	Auto / Internal / Digital Line Lock	
White Balance	ATW / AWC / Manual / Push	
WDR	On / Off (WDR Level, Weight)	
3D-DNR	On / Off (Off, Low, Mid, High)	
LSC / DIS / Eclipse	On / Off	
AGC	Low / Middle / High / Off	
Lens	Aspherical 2.8~12mm DC Auto Iris Lens	
IR LED	40 Units 850nm Infrared LED, 20,000 Hrs	
Beam Spread	36° + 56°	
Night View Distance	Indoor 35m / Outdoor 25m	
Oper Temp'/Hum'	-20°C ~ 60°C / 30% ~ 80%	
Store Temp'/Hum'	-30°C ~ 60°C / 20% ~ 90%	
Power (Max.)	12VDC, 500mA / 24VAC, 230mA	
Dimensions	145(ø) x 106(H)	
Weight	About 1,140g	

DIMENSION

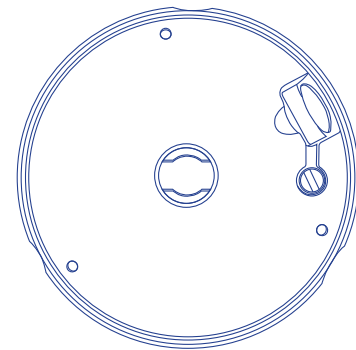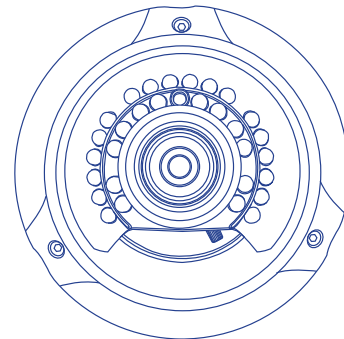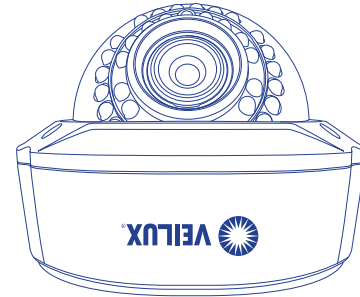

VEILUX®

The Art of Surveillance

3015 Eagle Drive, Suite 100, Grand Prairie, Texas 75052
Local Number: (214) 635-4855 / Fax: (928) 437-6270
sales@veilux.net
www.veilux.net