



# VEILUX®

## CAR REAR VIEW CAMERA

### SVC-42IR8




### SPECIFICATIONS

ITEM	SVC-42IR8	
TV System	NTSC	PAL
Image Sensor	1/3" SONY SuperHAD CCD	
CCD Total Pixel	270,000	320,000
Scanning System	525 Lines, 60 Fields/Sec	625 Lines, 50 Fields/Sec
Sync. System	Internal	
Frequency	(H) 15.734KHz x (V) 59.94Hz	(H) 15.625KHz x (V) 50.00
Resolution	420TV Lines	
S/N Ratio	48dB Min. (AGC Off)	
Video Output	1.0Vp-p Composite Video At 75ohm	
Lens	2.45mm	
Lens Angle	120°	
LEDs	8 EA (60°) CDS Control	
Night Distance	5m (Indoor: 8m)	
Min. illumination	0.01Lux 5600 K F2.0 / 0.000Lux (IR LED On)	
White Balance	ATW	
WB Range	AWB, ATW (3200~10000K)	
Electronic Shutter	1/60~1/100,000sec	1/50~1/100,00sec
Gamma Correction	γ=0.45	
Gain Control	AGC	
Operation Temp'	-20°C~50°C	
Operational Hum'	Within 90% RH	
Power Supply	12VDC / 220mA (Max)	
Dimensions	63.5mm(W) x 38mm(H) x 39mm(D)	
Weight	About 1,033g (Full Package)	
Cable	3m DIN, 15m External DC Cable (Option-Audio Cable)	

### FEATURES

- 1/3" SONY SuperHAD CCD
- Day & Night Function
- Waterproof (Certify IP-67)
- World Best Wide View 120°
- Mirror Function
- 420TV Lines
- 8 Units IR LEDs
- Night View Distance: (Indoor: 8m / Outdoor: 5m)
- Automatic Gain Control
- Auto White Balance Control
- 12VDC 220mA MAX
- Audio Function (Optional)

### DIMENSIONS

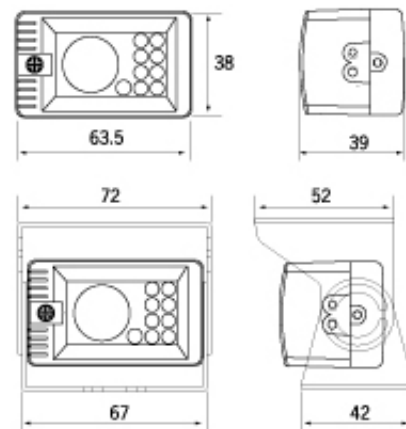

# VEILUX®

*The Art of Surveillance*